


FLOOR REPAIR LAMINATES



Durable concept for floor repair:

- Fiber glass laminate with tile imitation surface. Available in all RAL colors
- Defects in tile flooring removed:
 - loose grouting
 - loose and cracking tiles
 - keeps humidity away from floor base
- Excellent strength and low weight
- Easy and fast installation: total installation time is maximum of 8 hours
- Fulfills IMO Fire Test Procedures requirements for floor coverings and meets Parts 2 and 5 of the Fire Test Procedures Code (FTP Code).
- Certification for multicolor laminates pending.

WALL REPAIR LAMINATES

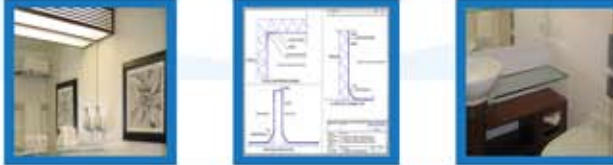

Solution for cabin wet unit wall corrosion repair:

- Fiber glass laminate. Painting available in all NCS/RAL colors and decorative patterns
- Repairs and covers damaged wall surface. Prevents humidity from penetrating the bulkhead
- Provides a clean new look
- Excellent strength and low weight
- Total installation time is approximately 5 hours per unit
- Approved for use as low flame spread material, with low smoke production and low smoke toxicity (IMO)
- Provided with all installation materials

For further information contact

service@almaco.cc

BALCONY DIVIDERS



ALMACO Balcony Divider is SOLAS-compliant:

- Non-combustible materials: aluminum, frosted tempered glass
- Easy installation: prefabricated door construction
- Painting according to RAL colors
- Compliant with SOLAS regulations and new IMO MSC draft amendments.

www.almaco.cc

United States . Finland . France . Italy . Singapore . China